



FIG.1

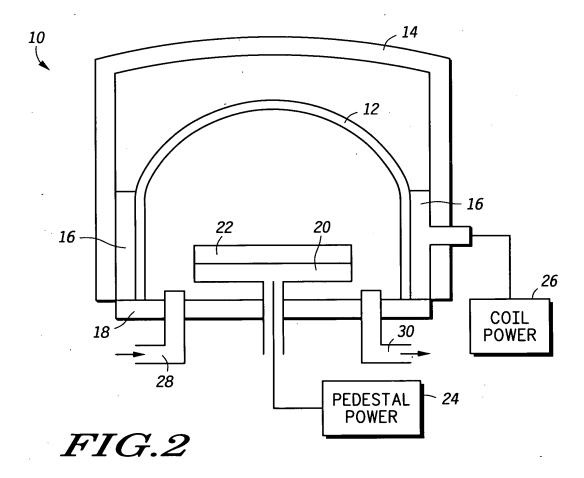


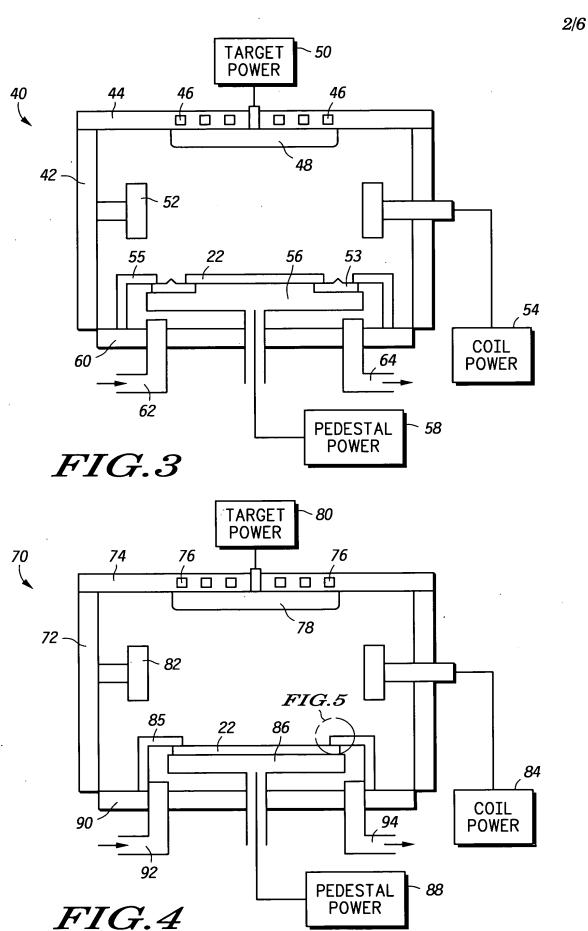

22

3/6 *8*5 106 104 <u>85</u> 107 105 102 100 <u>22</u> FIG.5 FIG.6 116 <u>99</u> 114 117 108 112 110 <u>22</u> FIG.7 - 212 *210* <u>210</u> <u>212a</u> 208 208 <u> 206</u> <u>212b</u> <u>206</u> 204 204 202 202 <u> 200</u>

FIG.8

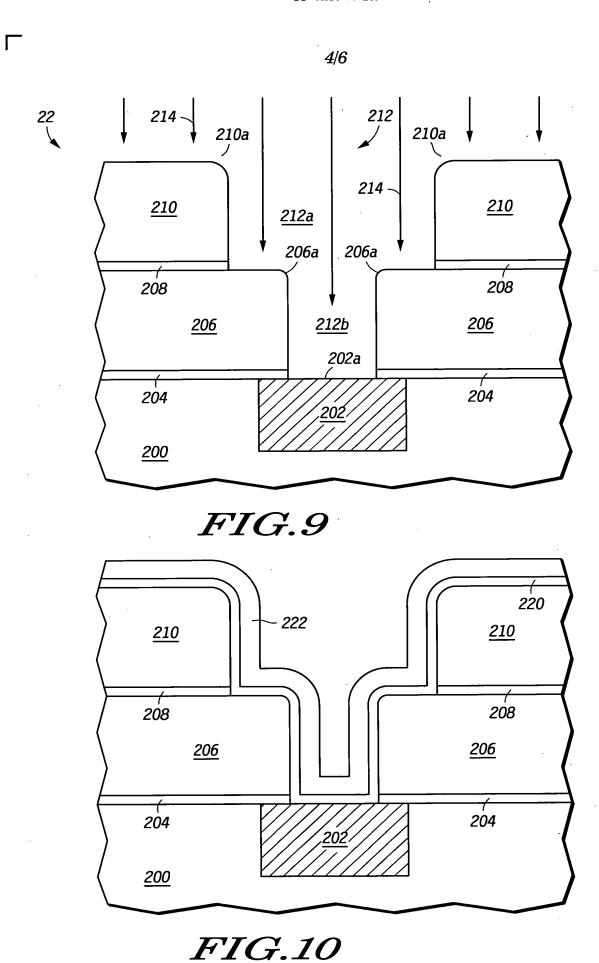

5/6

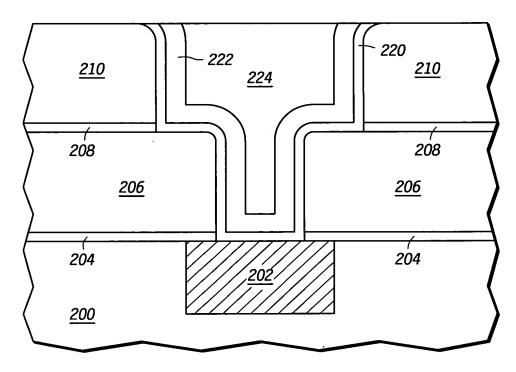


FIG.11

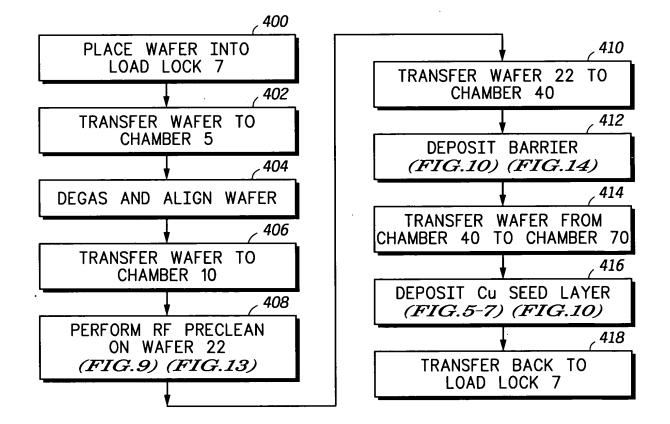


FIG.12

6/6

RF PRECLEAN CONDITIONS		
	PRIOR ART PRECLEAN	STEP 408 PRECLEAN
COIL POWER	200W	≥300₩
WAFER POWER	200W	≤100W
WAFER VOLTAGE	250V	50V

FIG.13

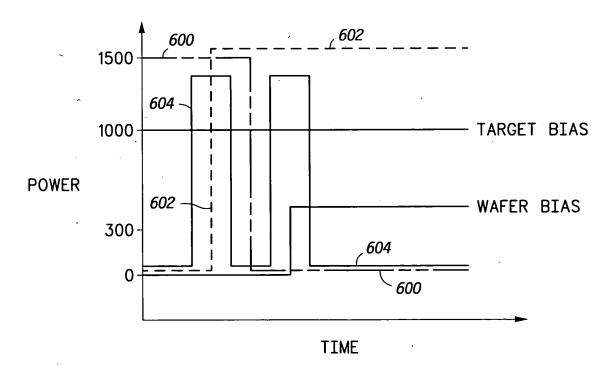


FIG.14